


Lynteck

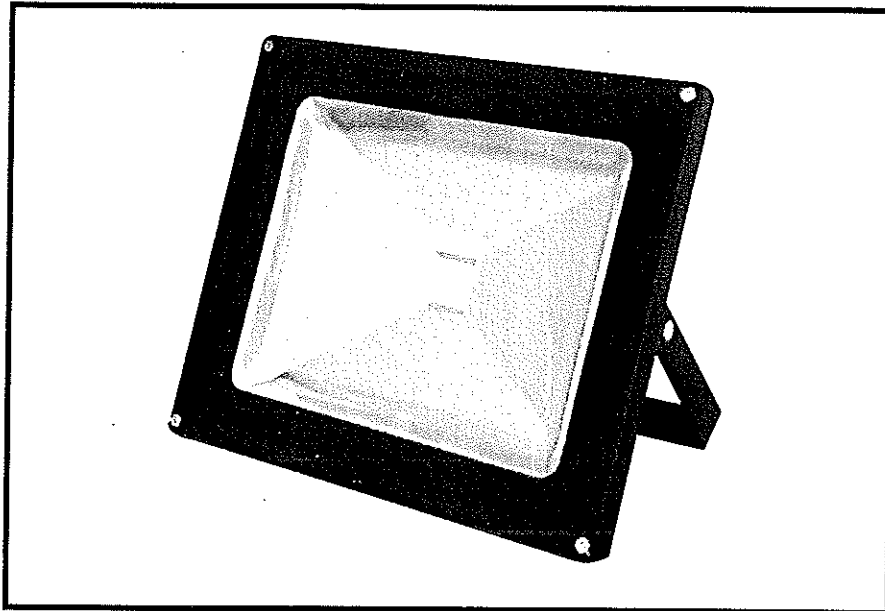

Model:

**LED Floodlights 10 Watt,30 Watt,50 Watt,
70 Watt & 100 Watt**

These instructions are provided as a guide to assist you.

PLEASE READ THESE INSTRUCTIONS BEFORE USING YOUR NEW FITTING

General Information & Cleaning

This product contains glass, care must be taken when, fitting or handling to prevent

Personal injury or damage to the product.

This light fitting must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Lynteck can not accept any liability for, loss, damage or premature failure from inappropriate use.

If in any doubt consult a qualified electrician

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off the MCB.

This unit is suitable for outdoor use and is rated IP 65.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry, It is not suitable for use on highly flammable surfaces such as polystyrene or textiles.

Before making fixing holes check that there are no obstructions hidden beneath the mounting surface such as pipes or cables. In drilling a hole ensure you are wearing safety goggles to protect your eyes.

Make sure that the fixings are strong enough to support the considerable weight of the fitting and hold it rigidly.

The floodlight must be positioned so that there is at least 50cm between the bulb and any illuminated surface. It should be positioned well away from flammable materials.

Do not attach to surfaces which are damp, freshly painted or otherwise electrically conductive.

This product is designed for permanent connection to a fixing wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are onto the bared connectors and not onto any insulation.

This product must be connected to an earth termination.

This product is not intended to be used by children and persons with sensory, physical or mental impairments that would prevent them using safely.

IMPORTANT: if the external flexible cable of this floodlight is damaged it should be exclusively replaced by a qualified engineer.

You are advised at every stage of your installation to double check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations, if in doubt contact a qualified electrician.

Clean the floodlight fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

Installation

Choose the location for your new light fitting giving considerations to the fixing points listed on this page for the mounting bracket.

Isolate the mains.

Mark fixing points by using the stirrup fixing holes and drill two fixing holes, according to your chosen fixing method to your chosen surface.


Terminate loose ends of wire to an appropriate IP rated junction box or similar, ensuring the Live, (Brown Wire), Earth (Yellow/Green Wire) and Neutral (Blue Wire) polarities are observed.

Restore power and test floodlight.


Adjust floodlight head towards the area to be illuminated and lock off using the two clamping bolts. Do not look directly into the floodlight when adjusting the floodlight illumination angle if powered up.

Mounting Bracket Spacing

10/30/50 Watt LED Floodlight

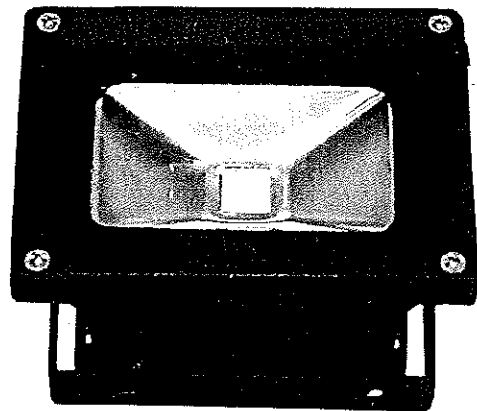

10 Watt 60mm
30 Watt 100mm
50 Watt 155mm

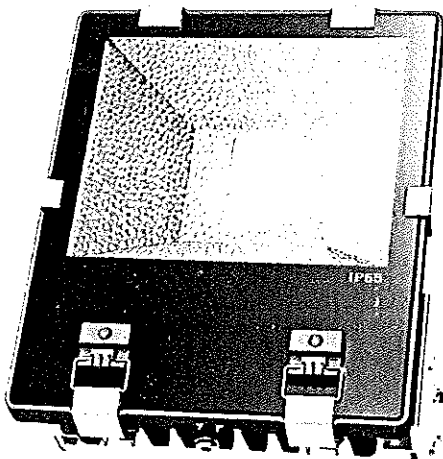

70/100 Watt LED Floodlight

70 Watt 130mm
100 Watt 135mm

LAMP REPLACEMENT

This floodlight has a sealed LED lamp and is maintenance free, no lamp replacement is required.

REPLACING LIGHT FITTING

When your light fitting comes to an end of its life or you choose to update or upgrade it by replacing it, please do not dispose of it with your normal household waste and please recycle where facilities exist. When you need to dispose this fitting, check with your retailer or local authority for suitable options. New regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective 2005-UK WEEE regulations effective 2nd January 2007).

PROBLEMS

If your floodlight is defective or develops a fault during the warranty period, please return to the place of purchase. If in doubt consult a qualified electrician.